

MARATHON™



SPECIFICATIONS

Top Terminal Batteries

G N B

INDUSTRIAL POWER

From the World Leader in VRLA Battery Technology

Designed for durability in Telecommunications and Electric Utility applications, the GNB **TOP Terminal MARATHON™** series provides high performance and reliability in long duration discharge applications. The **MARATHON™** family of batteries highlights another example of GNB's extensive experience and world wide leadership in VRLA technology.

“Designed in” Quality Manufacturing

Quality manufacturing processes for the **MARATHON™** series batteries incorporate the industry's most advanced technologies including: an automated helium leak detection system, a computer controlled “fill by weight” acid filler, and a temperature controlled water bath formation process. Each and every unit is capacity tested.

High Performance MARATHON™ Series Features

- Standard: Reinforced polypropylene container and cover
- Optional: Flame-retardant reinforced container and cover compliant with UL94 V-0, 28% L.O.I.
- Integrated Flash-arrester ultrasonically welded into cover.
- Patented “Diamond Side-Wall” design to maintain structural integrity in higher operating temperatures
- Heat sealed case-to-cover bond to ensure a leak proof seal
- High-Compression Absorbent Glass Mat (AGM) technology for greater than 99% recombination efficiency
- High-tin, calcium, silver, lead positive plate design for maximum service float life; 10 year design life @ 25°C (77°F)
- Heavy duty copper alloy terminals for ease of assembly and reduced maintenance
- Reliable one-way, self-resealing safety vents
- Multicell design for faster installation and reduced maintenance
- Horizontal or vertical operation
- Removable carry handles for ease of installation.

Applications

MARATHON™ series batteries incorporate GNB's advanced VRLA technology designed for long life and high performance in:

Telecommunications

- Distributed Power
- PCS
- Cellular
- Broadband

Electric Utility

- Switchgear Control Power
- Communications




MARATHON™ Specifications

Model Number [#]	Voltage	Capacity (AH)		Nominal Dimensions						Nominal Weight	
		8 Hr To 1.75 VPC @ 25°C	10 hr To 1.80 VPC @ 20°C	Inches			Millimeters			lbs.	Kg
				A	B	*C	A	B	*C		
M12V30T [%]	12	28	28	6.75	5.13	6.90	171	130	175	24	10.7
M12V40	12	40	37	7.81	6.58	7.01	198	167	178	39	17.8
M12V45F [%]	12	46	45	8.68	4.78	9.58	220	121	243	38	17.5
M12V70	12	72	71	10.25	6.85	8.80	260	174	224	61	27.8
M12V90	12	90	88	12.05	6.85	8.80	306	174	224	72	32.8
M6V190	6	190	186	12.05	6.85	8.80	306	174	224	74	33.5

* Bolt, washer, and connector typically increase height by 0.45 in. (11 mm)

Add suffix "F" to model number for flame retardant version OPTION

% Available in flame retardant version ONLY

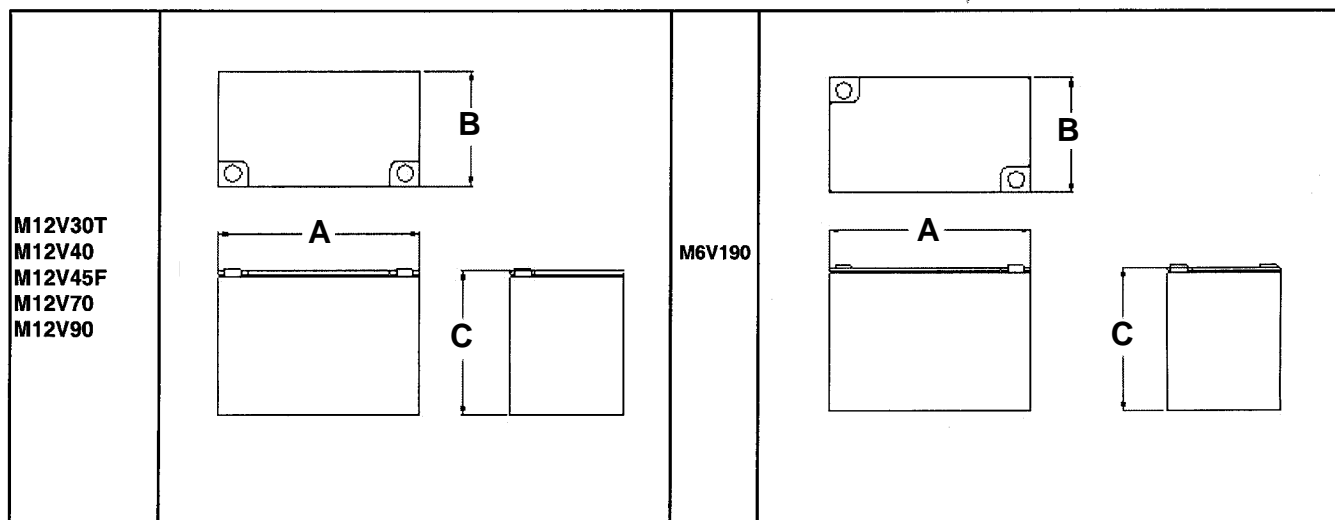

MARATHON™ Electrical Data

Model Number	Short Circuit Current (Amps)	Internal Resistance (mOhms)
M12V30T	1576	7.7
M12V40	2341	5.3
M12V45F	2162	5.4
M12V70	3271	3.7
M12V90	3365	3.7
M6V190	6343	1.0

Float Voltage & Charging

Constant Voltage charging is recommended

Recommended float voltage: 2.27 VPC @ 25°C (77°F)

Float Voltage Range: 2.25 to 2.30 VPC @ 25°C (77°F)

Equalize voltage: 2.35 VPC for 24 Hours

MARATHON™ Performance Specifications
Amperes @ 25°C (77°F)

1.75 Final VPC	Model Number	Time														
		24 hr	12 hr	10 hr	9 hr	8 hr	7 hr	6 hr	5 hr	4 hr	3 hr	2.5 hr	2 hr	1.5 hr	1 hr	0.5 hr
	M12V30T	1.3	2.5	2.9	3.2	3.6	4.1	4.7	5.5	6.6	8.4	9.8	11.9	15.1	21.2	36.9
	M12V40(F)	1.7	3.4	4.1	4.4	5.0	5.6	6.4	7.6	9.3	11.9	14.0	16.9	21.5	30.5	51.3
	M12V45F	2.1	4.0	4.7	5.2	5.8	6.5	7.5	8.7	10.6	13.5	15.8	19.1	24.0	33.2	57.8
	M12V70(F)	3.2	6.2	7.4	8.2	9.1	10.1	11.6	13.4	16.2	20.6	24.0	28.9	36.8	51.6	90.8
	M12V90(F)	4.2	7.8	9.2	10.1	11.2	12.7	14.3	16.7	20.2	25.9	30.2	36.5	46.6	65.7	107.0
	M6V190(F)	9.1	16.6	19.5	21.4	23.7	26.7	30.6	35.9	43.7	56.0	65.6	79.5	102.0	144.9	246.0

1.78 Final VPC	Model Number	Time														
		24 hr	12 hr	10 hr	9 hr	8 hr	7 hr	6 hr	5 hr	4 hr	3 hr	2.5 hr	2 hr	1.5 hr	1 hr	0.5 hr
	M12V30T	1.3	2.4	2.9	3.2	3.6	4.1	4.7	5.4	6.6	8.3	9.7	11.7	14.9	21.0	36.6
	M12V40(F)	1.7	3.4	4.0	4.3	4.9	5.5	6.3	7.5	9.2	11.8	13.9	16.8	21.3	30.2	50.7
	M12V45F	2.1	4.0	4.7	5.2	5.7	6.5	7.5	8.7	10.5	13.5	15.7	18.9	23.8	32.9	57.0
	M12V70(F)	3.2	6.2	7.4	8.1	9.0	10.0	11.4	13.3	16.0	20.4	23.8	28.7	36.5	51.3	90.0
	M12V90(F)	4.1	7.7	9.1	10.0	11.2	12.6	14.2	16.6	20.0	25.5	29.8	36.0	45.9	64.7	105.2
	M6V190(F)	9.0	16.5	19.4	21.2	23.6	26.5	30.3	35.6	43.3	55.5	65.0	78.8	101.1	143.5	241.6

1.80 Final VPC	Model Number	Time														
		24 hr	12 hr	10 hr	9 hr	8 hr	7 hr	6 hr	5 hr	4 hr	3 hr	2.5 hr	2 hr	1.5 hr	1 hr	0.5 hr
	M12V30T	1.3	2.4	2.9	3.2	3.6	4.0	4.6	5.4	6.5	8.3	9.6	11.6	14.8	20.8	36.0
	M12V40(F)	1.7	3.4	4.0	4.3	4.9	5.5	6.3	7.5	9.2	11.8	13.8	16.7	21.2	30.0	50.0
	M12V45F	2.1	3.9	4.7	5.1	5.7	6.4	7.4	8.6	10.4	13.3	15.5	18.8	23.6	32.5	56.0
	M12V70(F)	3.2	6.2	7.4	8.0	8.9	9.9	11.3	13.2	15.9	20.3	23.6	28.5	36.3	51.0	89.0
	M12V90(F)	4.1	7.7	9.1	10.0	11.1	12.5	14.1	16.5	19.9	25.3	29.5	35.7	45.5	64.0	103.3
	M6V190(F)	8.9	16.4	19.2	21.1	23.4	26.3	30.1	35.3	43.0	55.0	64.3	77.9	99.9	142.0	236.5

1.81 Final VPC	Model Number	Time														
		24 hr	12 hr	10 hr	9 hr	8 hr	7 hr	6 hr	5 hr	4 hr	3 hr	2.5 hr	2 hr	1.5 hr	1 hr	0.5 hr
	M12V30T	1.3	2.4	2.9	3.2	3.5	4.0	4.6	5.3	6.4	8.2	9.5	11.4	14.6	20.5	35.4
	M12V40(F)	1.7	3.4	4.0	4.3	4.8	5.4	6.2	7.4	9.1	11.7	13.7	16.6	21.1	29.9	49.6
	M12V45F	2.1	3.9	4.6	5.1	5.6	6.4	7.3	8.5	10.3	13.2	15.4	18.6	23.3	32.0	54.8
	M12V70(F)	3.1	6.1	7.3	8.0	8.8	9.9	11.2	13.1	15.8	20.1	23.4	28.2	35.9	50.6	87.4
	M12V90(F)	4.1	7.6	9.0	9.9	11.0	12.4	14.0	16.3	19.7	25.1	29.3	35.4	45.1	63.5	101.8
	M6V190(F)	8.8	16.2	19.0	20.9	23.2	26.1	29.9	35.1	42.6	54.5	63.6	76.9	98.5	139.5	231.0

1.83 Final VPC	Model Number	Time														
		24 hr	12 hr	10 hr	9 hr	8 hr	7 hr	6 hr	5 hr	4 hr	3 hr	2.5 hr	2 hr	1.5 hr	1 hr	0.5 hr
	M12V30T	1.2	2.4	2.8	3.1	3.5	3.9	4.5	5.2	6.3	8.0	9.4	11.3	14.4	20.2	34.8
	M12V40(F)	1.6	3.3	3.9	4.2	4.7	5.3	6.1	7.3	9.0	11.6	13.6	16.4	20.9	29.5	48.5
	M12V45F	2.0	3.8	4.5	5.0	5.6	6.3	7.3	8.4	10.2	13.0	15.2	18.3	22.9	31.4	53.5
	M12V70(F)	3.1	6.0	7.1	7.9	8.8	9.8	11.1	12.9	15.6	19.9	23.2	27.9	35.6	50.1	85.6
	M12V90(F)	4.0	7.5	8.9	9.8	10.8	12.2	13.8	16.1	19.4	24.7	28.8	34.8	44.3	62.4	100.3
	M6V190(F)	8.6	16.0	18.8	20.7	23.0	25.9	29.6	34.8	42.2	53.7	62.7	75.8	96.8	136.5	224.3

MARATHON™ Performance Specifications
Amperes @ 25°C (77°F)

1.85 Final VPC	Model Number	Time														
		24 hr	12 hr	10 hr	9 hr	8 hr	7 hr	6 hr	5 hr	4 hr	3 hr	2.5 hr	2 hr	1.5 hr	1 hr	0.5 hr
	M12V30T	1.2	2.3	2.8	3.1	3.4	3.9	4.5	5.1	6.2	7.9	9.2	11.1	14.1	19.9	34.0
	M12V40(F)	1.6	3.3	3.9	4.2	4.7	5.3	6.1	7.2	8.8	11.4	13.3	16.0	20.4	28.8	47.2
	M12V45F	2.0	3.8	4.5	4.9	5.5	6.2	7.1	8.3	10.0	12.8	14.9	18.0	22.5	30.7	52.0
	M12V70(F)	3.0	5.9	7.0	7.7	8.6	9.6	10.9	12.8	15.4	19.6	22.9	27.6	35.1	49.4	83.0
	M12V90(F)	4.0	7.4	8.7	9.6	10.7	12.0	13.6	15.8	19.1	24.3	28.3	34.2	43.6	61.3	98.0
	M6V190(F)	8.5	15.7	18.5	20.3	22.6	25.4	29.2	34.4	41.5	52.7	61.5	74.2	94.6	133.1	216.6

1.87 Final VPC	Model Number	Time														
		24 hr	12 hr	10 hr	9 hr	8 hr	7 hr	6 hr	5 hr	4 hr	3 hr	2.5 hr	2 hr	1.5 hr	1 hr	0.5 hr
	M12V30T	1.2	2.3	2.7	3.0	3.3	3.7	4.3	5.0	6.0	7.6	8.9	10.7	13.7	19.3	33.0
	M12V40(F)	1.6	3.1	3.6	4.0	4.5	5.1	5.8	6.9	8.4	10.9	12.7	15.4	19.5	27.3	44.6
	M12V45F	2.0	3.7	4.3	4.8	5.3	6.0	6.9	8.0	9.7	12.4	14.5	17.5	21.8	29.6	49.5
	M12V70(F)	3.0	5.7	6.8	7.5	8.3	9.3	10.6	12.4	14.9	18.9	22.0	26.6	33.8	47.4	78.6
	M12V90(F)	3.9	7.2	8.5	9.3	10.3	11.6	13.1	15.3	18.5	23.5	27.4	33.0	41.9	58.8	93.7
	M6V190(F)	8.2	15.2	17.9	19.7	21.8	24.6	28.2	33.1	40.0	50.8	59.2	71.3	90.7	127.3	204.3

1.90 Final VPC	Model Number	Time														
		24 hr	12 hr	10 hr	9 hr	8 hr	7 hr	6 hr	5 hr	4 hr	3 hr	2.5 hr	2 hr	1.5 hr	1 hr	0.5 hr
	M12V30T	1.1	2.2	2.6	2.8	3.1	3.6	4.1	4.7	5.7	7.2	8.4	10.2	13.0	18.3	31.0
	M12V40(F)	1.5	2.9	3.4	3.8	4.2	4.8	5.6	6.6	8.0	10.4	12.2	14.7	18.6	25.9	42.4
	M12V45F	1.9	3.5	4.1	4.5	5.0	5.7	6.5	7.6	9.3	12.0	13.9	16.7	20.7	28.0	45.9
	M12V70(F)	2.8	5.4	6.4	7.1	7.9	9.0	10.1	11.7	14.1	17.9	20.8	25.1	31.8	44.4	72.5
	M12V90(F)	3.7	6.8	8.0	8.8	9.8	11.0	12.6	14.6	17.5	22.2	25.8	31.1	39.5	55.2	87.6
	M6V190(F)	7.8	14.5	17.0	18.7	20.8	23.4	26.8	31.5	37.8	47.9	55.7	67.0	84.9	118.7	187.8

1.92 Final VPC	Model Number	Time														
		24 hr	12 hr	10 hr	9 hr	8 hr	7 hr	6 hr	5 hr	4 hr	3 hr	2.5 hr	2 hr	1.5 hr	1 hr	0.5 hr
	M12V30T	1.1	2.0	2.4	2.6	2.9	3.3	3.8	4.5	5.4	6.9	8.0	9.6	12.3	17.2	29.1
	M12V40(F)	1.4	2.8	3.2	3.6	4.0	4.5	5.2	6.2	7.6	9.8	11.5	13.9	17.6	24.4	39.8
	M12V45F	1.8	3.3	3.9	4.3	4.8	5.4	6.1	7.2	8.8	11.4	13.2	15.7	19.4	26.2	42.6
	M12V70(F)	2.7	5.1	6.1	6.7	7.4	8.4	9.5	11.1	13.3	16.8	19.5	23.5	29.7	41.4	64.6
	M12V90(F)	3.6	6.5	7.6	8.3	9.2	10.3	11.8	13.8	16.7	21.2	24.6	29.6	37.2	51.4	81.9
	M6V190(F)	7.5	13.7	16.1	17.7	19.6	22.1	25.3	29.7	36.0	45.1	52.3	62.8	79.4	110.4	146.8

1.94 Final VPC	Model Number	Time														
		24 hr	12 hr	10 hr	9 hr	8 hr	7 hr	6 hr	5 hr	4 hr	3 hr	2.5 hr	2 hr	1.5 hr	1 hr	0.5 hr
	M12V30T	1.0	1.9	2.2	2.5	2.8	3.1	3.6	4.2	5.1	6.4	7.5	9.0	11.5	16.1	26.8
	M12V40(F)	1.3	2.5	3.0	3.3	3.7	4.2	4.9	5.7	7.0	9.1	10.7	12.9	16.3	22.5	36.7
	M12V45F	1.7	3.1	3.7	4.1	4.5	5.1	5.8	6.8	8.3	10.8	12.4	14.8	18.2	24.5	39.4
	M12V70(F)	2.5	4.8	5.7	6.3	7.0	8.0	9.0	10.4	12.5	15.8	18.3	21.9	27.6	38.4	54.9
	M12V90(F)	3.3	6.1	7.1	7.8	8.7	9.7	11.1	13.0	15.8	20.2	23.5	28.2	35.1	47.8	76.4
	M6V190(F)	7.0	13.0	15.3	16.7	18.6	20.9	23.9	28.1	33.5	42.3	49.0	58.6	73.8	102.3	128.6

MARATHON™

MARATHON™ Performance Specifications Watts per Cell @ 25°C (77°F)

1.75 Final VPC	Model Number	Time											
		24 hr	12 hr	10 hr	9 hr	8 hr	6 hr	4 hr	3 hr	2 hr	1.5 hr	1 hr	0.5 hr
	M12V30T	2.4	4.8	5.7	6.4	7.0	9.0	12.6	16.1	22.7	29.0	40.8	71.6
	M12V40(F)	2.9	5.5	6.6	7.2	8.1	10.6	15.4	20.1	29.2	38.0	54.6	96.5
	M12V45F	4.2	7.8	9.2	10.1	11.2	14.5	20.4	26.1	36.7	46.5	65.0	107.8
	M12V70(F)	6.7	12.6	14.9	16.4	18.3	23.2	32.3	40.8	56.8	71.8	100.0	174.0
	M12V90(F)	7.7	14.9	17.7	19.6	21.9	27.7	39.3	50.3	71.2	91.0	128.7	209.0
	M6V190(F)	17.8	33.3	39.2	43.2	48.0	62.4	90.0	112.4	155.8	197.1	274.7	465.0

1.78 Final VPC	Model Number	Time											
		24 hr	12 hr	10 hr	9 hr	8 hr	6 hr	4 hr	3 hr	2 hr	1.5 hr	1 hr	0.5 hr
	M12V30T	2.4	4.8	5.7	6.3	7.0	8.9	12.6	16.0	22.5	28.7	40.5	71.0
	M12V40(F)	2.8	5.5	6.5	7.2	8.1	10.5	15.3	20.0	29.1	37.8	54.3	96.0
	M12V45F	4.1	7.7	9.1	10.0	11.2	14.5	20.3	25.9	36.4	46.2	64.5	106.6
	M12V70(F)	6.7	12.6	14.8	16.3	18.2	23.0	32.1	40.6	56.5	71.5	99.5	172.0
	M12V90(F)	7.6	14.8	17.5	19.4	21.7	27.5	38.9	49.8	70.4	90.0	127.3	206.0
	M6V190(F)	17.6	33.0	38.9	42.8	47.6	61.8	89.3	111.1	154.5	195.4	272.0	456.1

1.80 Final VPC	Model Number	Time											
		24 hr	12 hr	10 hr	9 hr	8 hr	6 hr	4 hr	3 hr	2 hr	1.5 hr	1 hr	0.5 hr
	M12V30T	2.4	4.7	5.7	6.3	7.0	8.9	12.5	15.9	22.4	28.6	40.3	70.4
	M12V40(F)	2.8	5.5	6.5	7.2	8.0	10.5	15.3	19.9	29.0	37.6	54.0	95.1
	M12V45F	4.1	7.7	9.1	10.0	11.1	14.4	20.2	25.7	36.0	45.7	64.0	105.2
	M12V70(F)	6.7	12.5	14.8	16.2	18.1	23.0	31.9	40.4	56.2	71.0	98.9	170.0
	M12V90(F)	7.6	14.7	17.4	19.3	21.6	27.3	38.6	49.4	69.8	89.2	126.2	203.1
	M6V190(F)	17.5	32.8	38.7	42.5	47.3	61.4	88.7	110.4	153.4	193.7	269.0	447.1

1.83 Final VPC	Model Number	Time											
		24 hr	12 hr	10 hr	9 hr	8 hr	6 hr	4 hr	3 hr	2 hr	1.5 hr	1 hr	0.5 hr
	M12V30T	2.4	4.7	5.6	6.2	6.8	8.7	12.3	15.6	22.0	28.0	39.3	68.2
	M12V40(F)	2.8	5.5	6.5	7.2	8.0	10.4	15.2	19.8	28.7	37.3	53.3	93.5
	M12V45F	4.0	7.6	8.9	9.8	10.9	14.2	19.7	25.0	35.1	44.5	62.3	101.3
	M12V70(F)	6.5	12.2	14.4	15.9	17.7	22.6	31.3	39.5	55.0	69.6	96.9	164.0
	M12V90(F)	7.4	14.3	17.1	18.9	21.1	26.8	37.7	48.2	67.9	86.7	122.2	195.1
	M6V190(F)	17.2	32.1	37.8	41.6	46.2	59.9	86.2	108.5	151.0	189.2	260.0	424.4

MARATHON™

MARATHON™ Performance Specifications Watts per Cell @ 25°C (77°F)

1.85 Final VPC	Model Number	Time											
		24 hr	12 hr	10 hr	9 hr	8 hr	6 hr	4 hr	3 hr	2 hr	1.5 hr	1 hr	0.5 hr
	M12V30T	2.4	4.6	5.5	6.1	6.8	8.6	12.1	15.4	21.7	27.6	38.8	67.2
	M12V40(F)	2.8	5.4	6.5	7.1	8.0	10.4	15.1	19.7	28.5	37.0	52.8	92.0
	M12V45F	4.0	7.4	8.8	9.7	10.8	14.0	19.4	24.6	34.5	43.7	60.9	98.7
	M12V70(F)	6.5	12.1	14.2	15.7	17.4	22.3	30.9	39.0	54.1	68.5	95.4	160.0
	M12V90(F)	7.3	14.1	16.8	18.6	20.8	26.4	37.1	47.3	66.6	84.9	119.6	190.0
	M6V190(F)	16.9	31.7	37.4	41.1	45.8	59.3	85.0	107.0	149.0	186.2	254.9	410.1


1.87 Final VPC	Model Number	Time											
		24 hr	12 hr	10 hr	9 hr	8 hr	6 hr	4 hr	3 hr	2 hr	1.5 hr	1 hr	0.5 hr
	M12V30T	2.3	4.5	5.4	5.9	6.6	8.4	11.7	14.9	20.9	26.6	37.4	64.4
	M12V40(F)	2.8	5.4	6.4	7.1	7.9	10.3	14.9	19.4	28.1	36.3	51.4	89.3
	M12V45F	3.9	7.2	8.5	9.4	10.4	13.5	18.8	23.8	33.3	42.2	59.0	94.8
	M12V70(F)	6.3	11.7	13.8	15.2	16.9	21.5	30.0	37.9	52.9	66.9	93.3	154.9
	M12V90(F)	7.1	13.7	16.2	17.9	20.1	25.6	36.0	45.8	64.3	81.9	115.1	181.7
	M6V190(F)	16.6	30.8	36.2	39.7	44.1	56.8	81.4	105.0	145.4	180.6	245.0	388.3

1.90 Final VPC	Model Number	Time											
		24 hr	12 hr	10 hr	9 hr	8 hr	6 hr	4 hr	3 hr	2 hr	1.5 hr	1 hr	0.5 hr
	M12V30T	2.2	4.3	5.1	5.7	6.3	8.0	11.2	14.3	20.1	25.6	36.0	61.2
	M12V40(F)	2.7	5.2	6.2	6.9	7.6	10.0	14.4	16.7	26.8	34.5	48.7	84.2
	M12V45F	3.7	6.9	8.1	9.0	10.0	12.7	17.8	22.6	31.6	40.1	56.1	89.3
	M12V70(F)	6.0	11.2	13.2	14.5	16.1	20.8	28.6	36.1	50.2	63.4	88.1	144.6
	M12V90(F)	6.8	13.0	15.4	17.0	19.0	24.4	34.2	43.5	60.9	77.4	108.4	169.9
	M6V190(F)	16.1	29.5	34.6	37.9	42.0	54.1	77.1	100.0	140.0	172.4	231.3	358.1


1.92 Final VPC	Model Number	Time											
		24 hr	12 hr	10 hr	9 hr	8 hr	6 hr	4 hr	3 hr	2 hr	1.5 hr	1 hr	0.5 hr
	M12V30T	2.1	4.0	4.8	5.3	5.9	7.5	10.6	13.4	18.9	24.0	33.7	57.3
	M12V40(F)	2.6	5.0	6.0	6.6	7.3	9.5	13.8	17.8	25.5	32.7	45.9	79.3
	M12V45F	3.5	6.5	7.7	8.5	9.4	12.1	16.9	21.4	29.9	37.9	53.0	84.4
	M12V70(F)	5.7	10.6	12.5	13.7	15.2	19.7	27.1	34.2	47.4	59.7	82.7	134.7
	M12V90(F)	6.4	12.3	14.5	16.1	17.9	23.3	32.4	41.1	57.3	72.5	101.1	155.4
	M6V190(F)	15.4	28.2	33.0	36.2	40.1	51.5	73.4	95.0	132.0	162.4	217.4	296.7

1.94 Final VPC	Model Number	Time											
		24 hr	12 hr	10 hr	9 hr	8 hr	6 hr	4 hr	3 hr	2 hr	1.5 hr	1 hr	0.5 hr
	M12V30T	1.9	3.8	4.5	5.0	5.6	7.1	9.9	12.6	17.6	22.4	31.3	53.0
	M12V40(F)	2.5	4.8	5.6	6.2	6.9	9.0	12.9	16.7	23.9	30.6	42.8	73.7
	M12V45F	3.3	6.2	7.3	8.0	8.9	11.6	16.1	20.3	28.3	35.8	49.9	79.6
	M12V70(F)	5.4	10.0	11.8	12.9	14.4	18.6	25.7	32.3	44.6	56.1	77.3	125.5
	M12V90(F)	6.1	11.6	13.7	15.1	16.8	21.8	30.8	38.8	53.7	67.7	93.8	144.3
	M6V190(F)	14.6	26.8	31.4	34.5	38.2	49.2	70.3	90.5	125.2	153.4	204.1	262.8

M12V30T - Performance Curves Amperes @ 25°C (77°F)

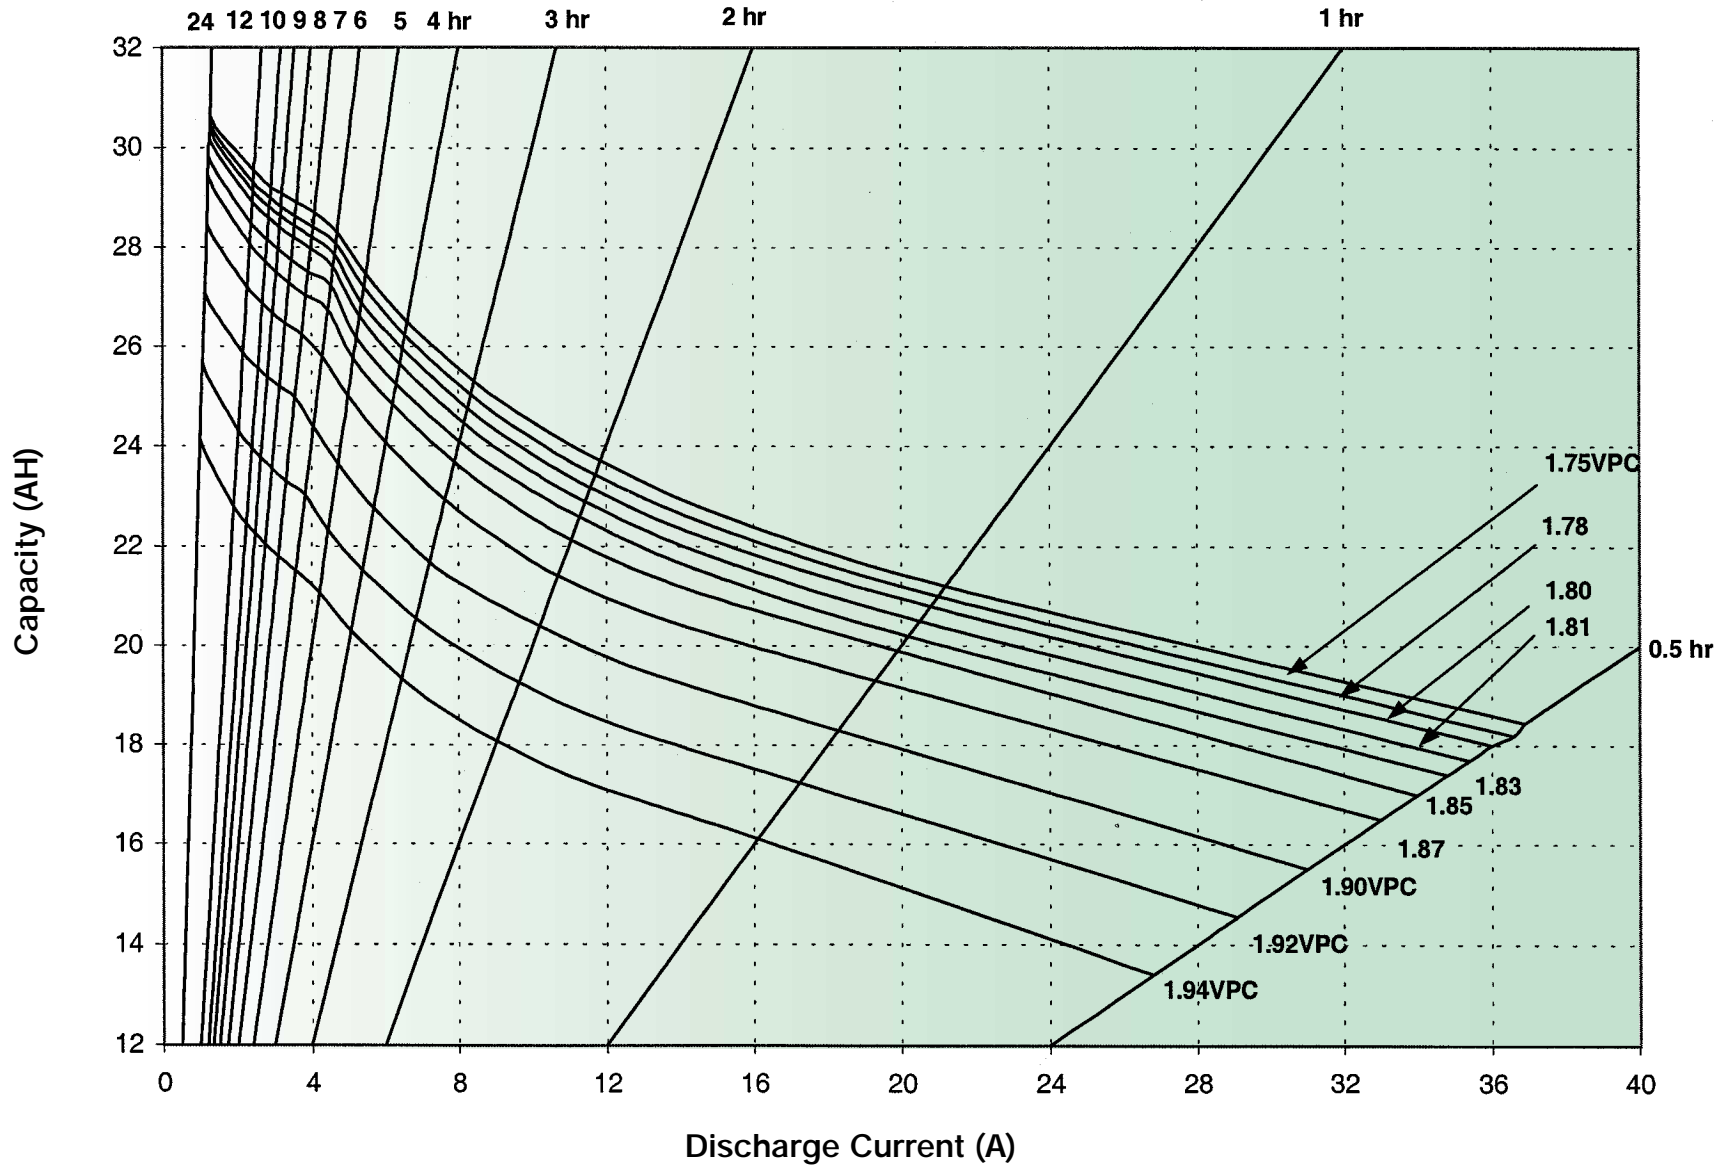


M12V40(F) - Performance Curves Amperes @ 25°C (77°F)

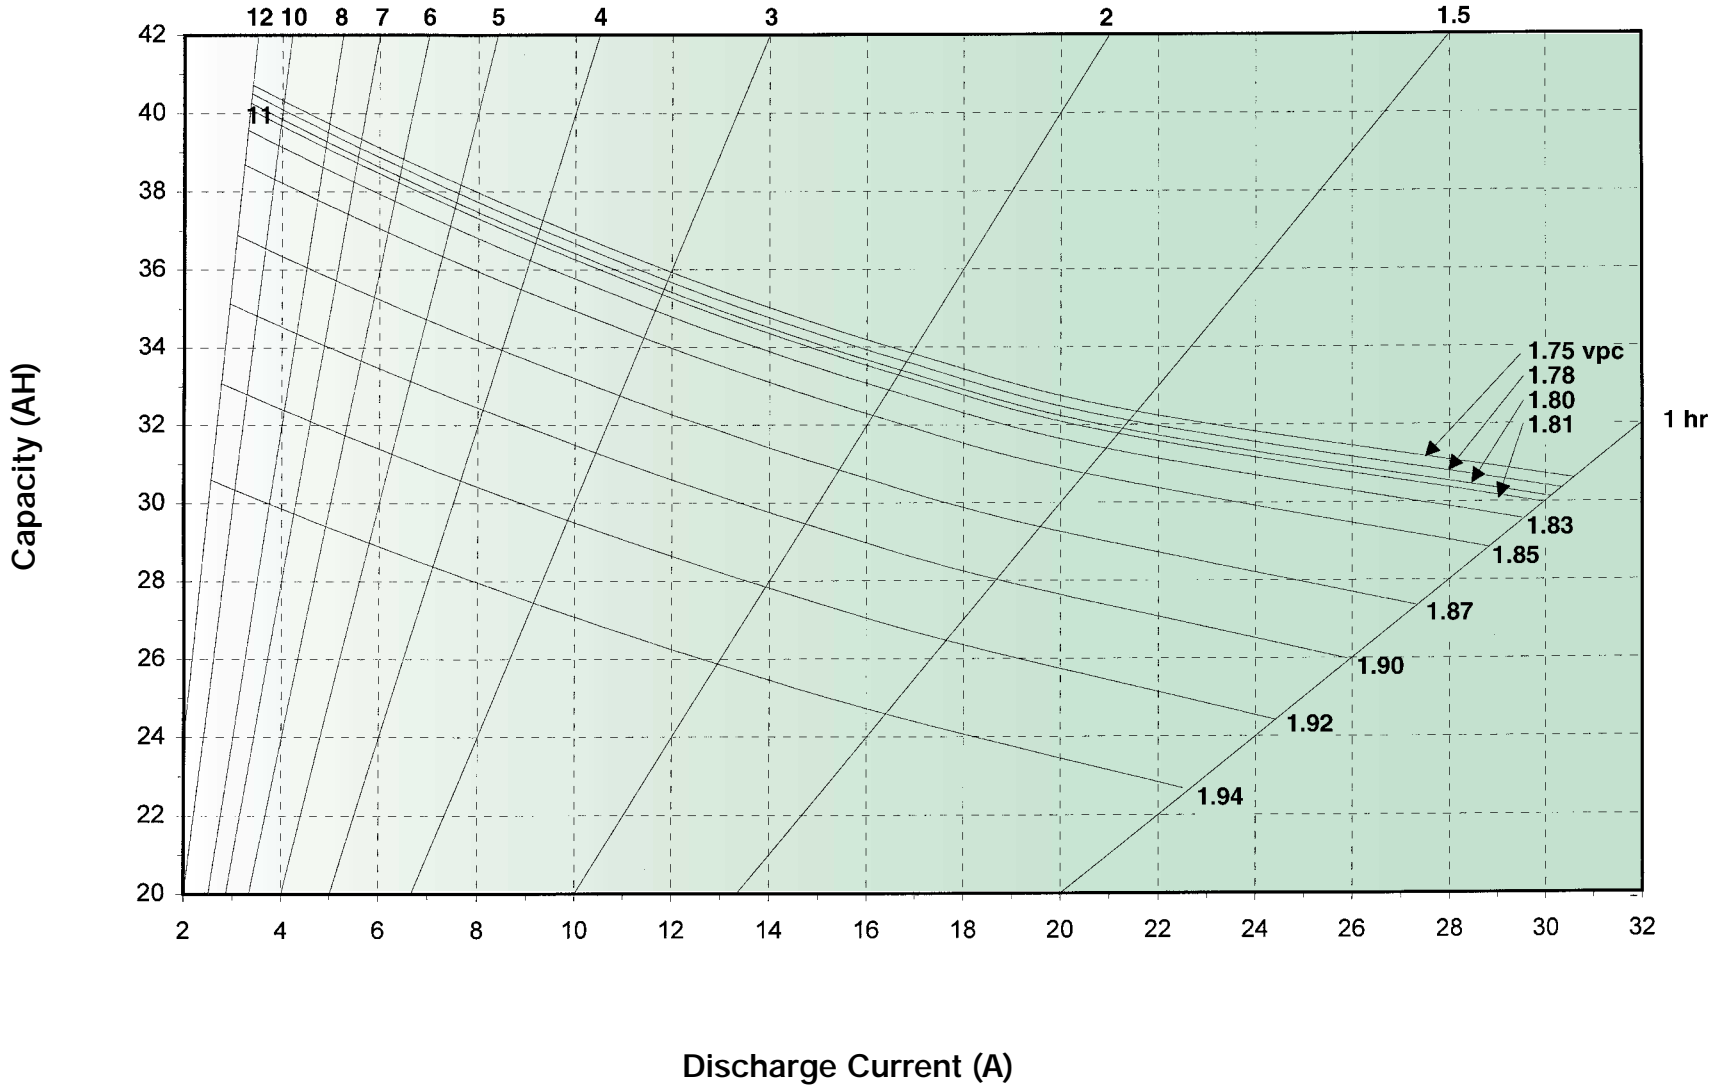


MARATHON
TM


M12V45F - Performance Curves Amperes @ 25°C (77°F)

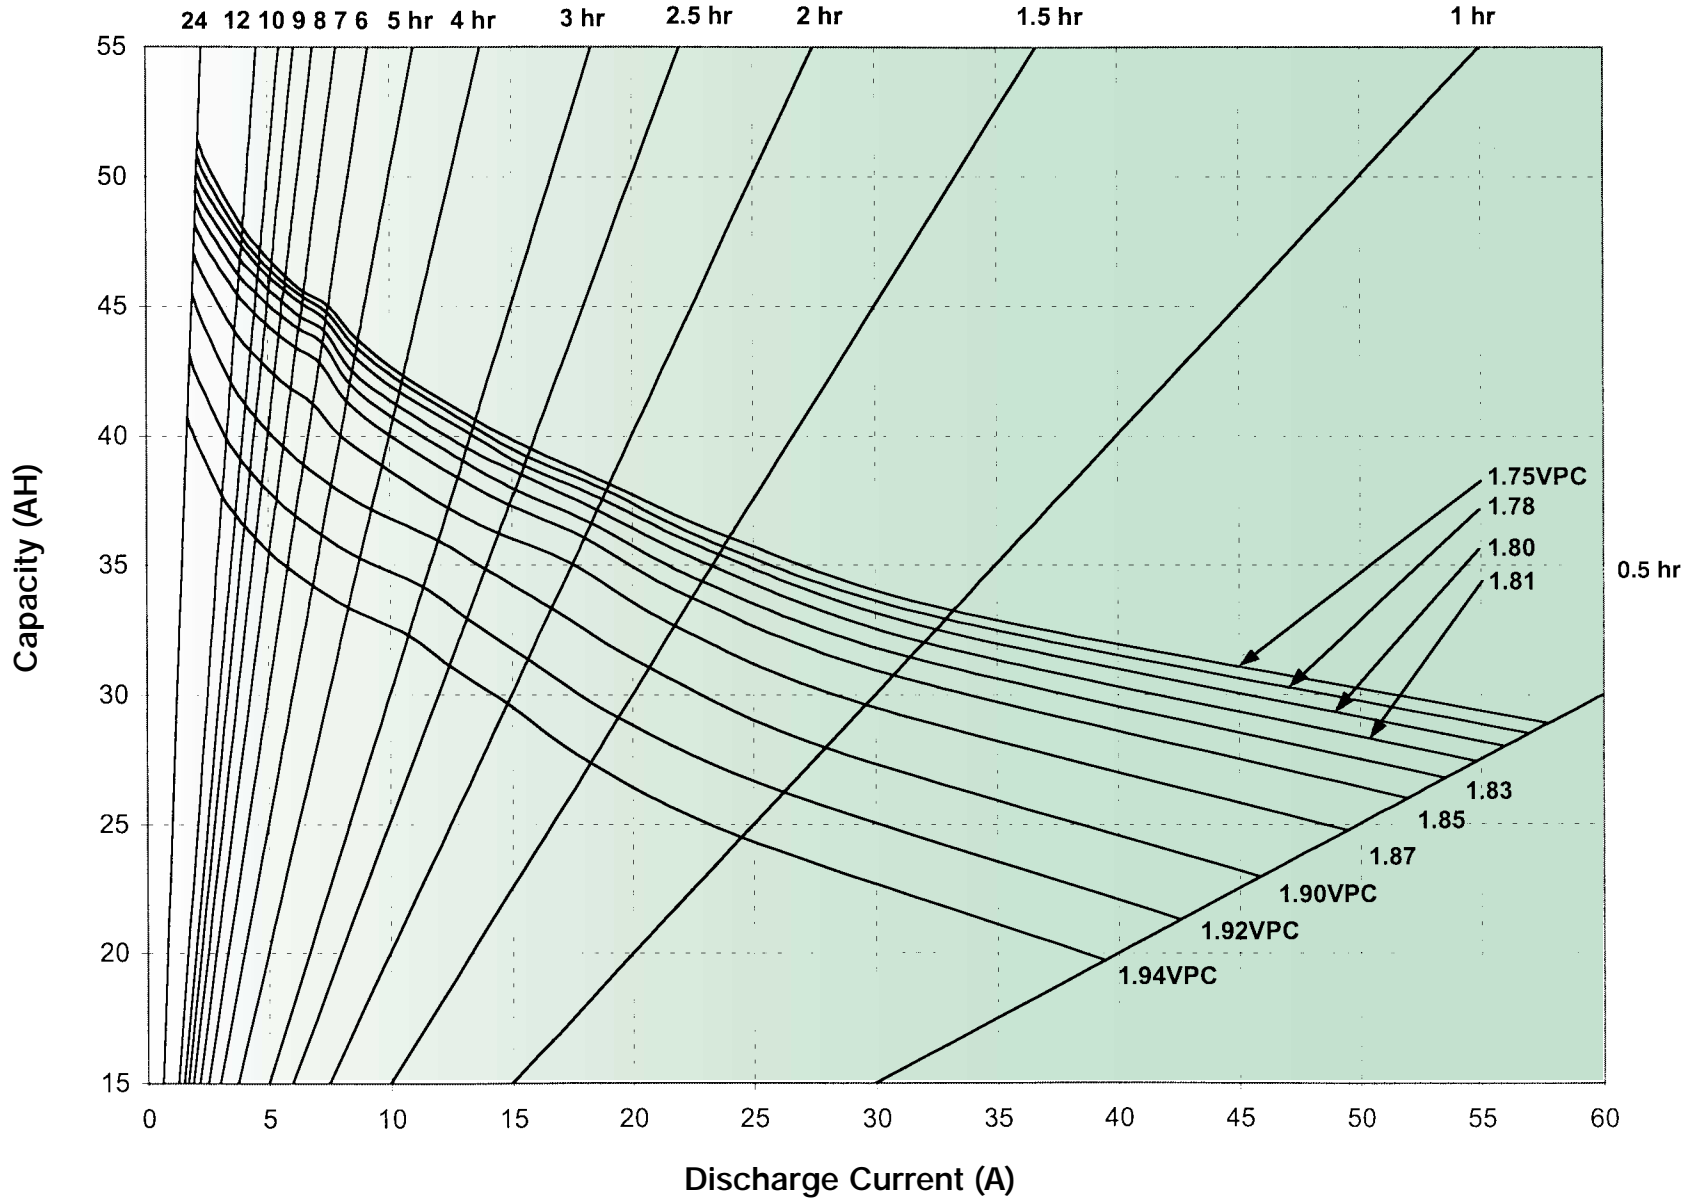

M12V70(F) - Performance Curves Amperes @ 25°C (77°F)

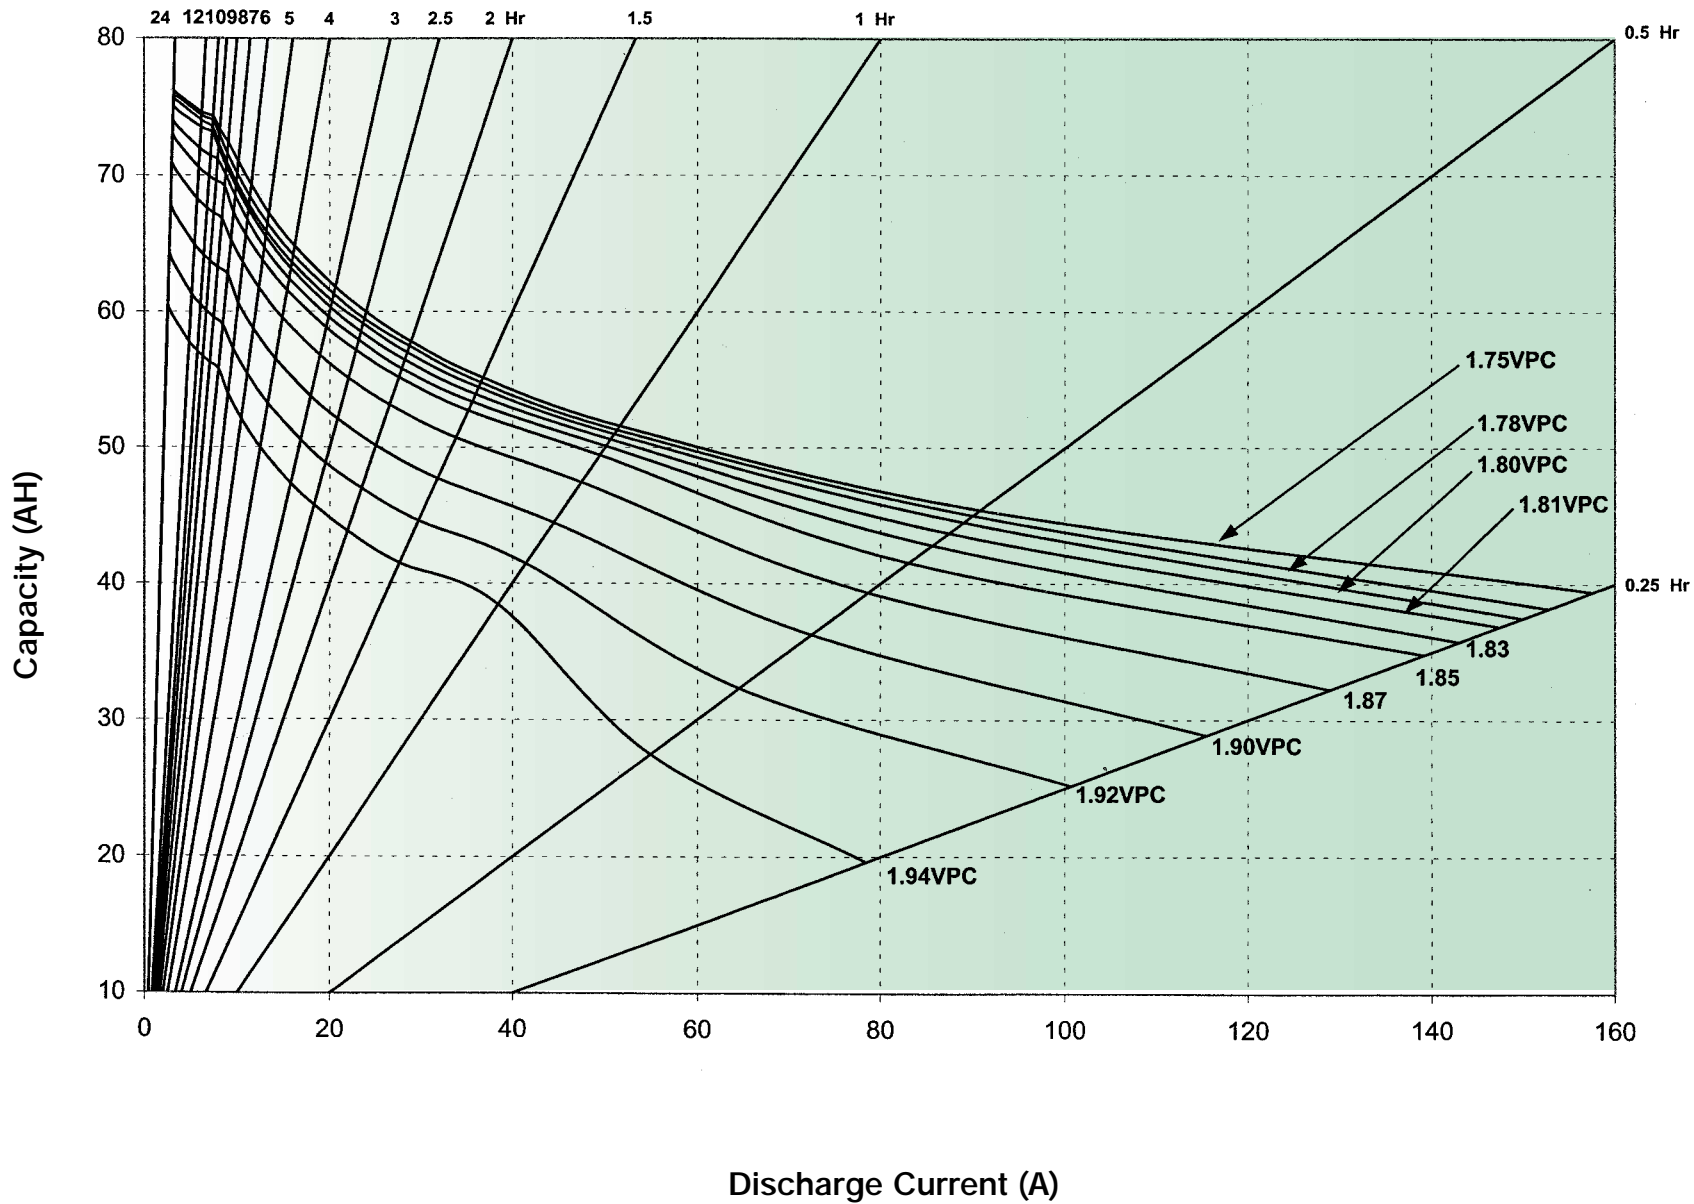


M12V90(F) - Performance Curves Amperes @ 25°C (77°F)

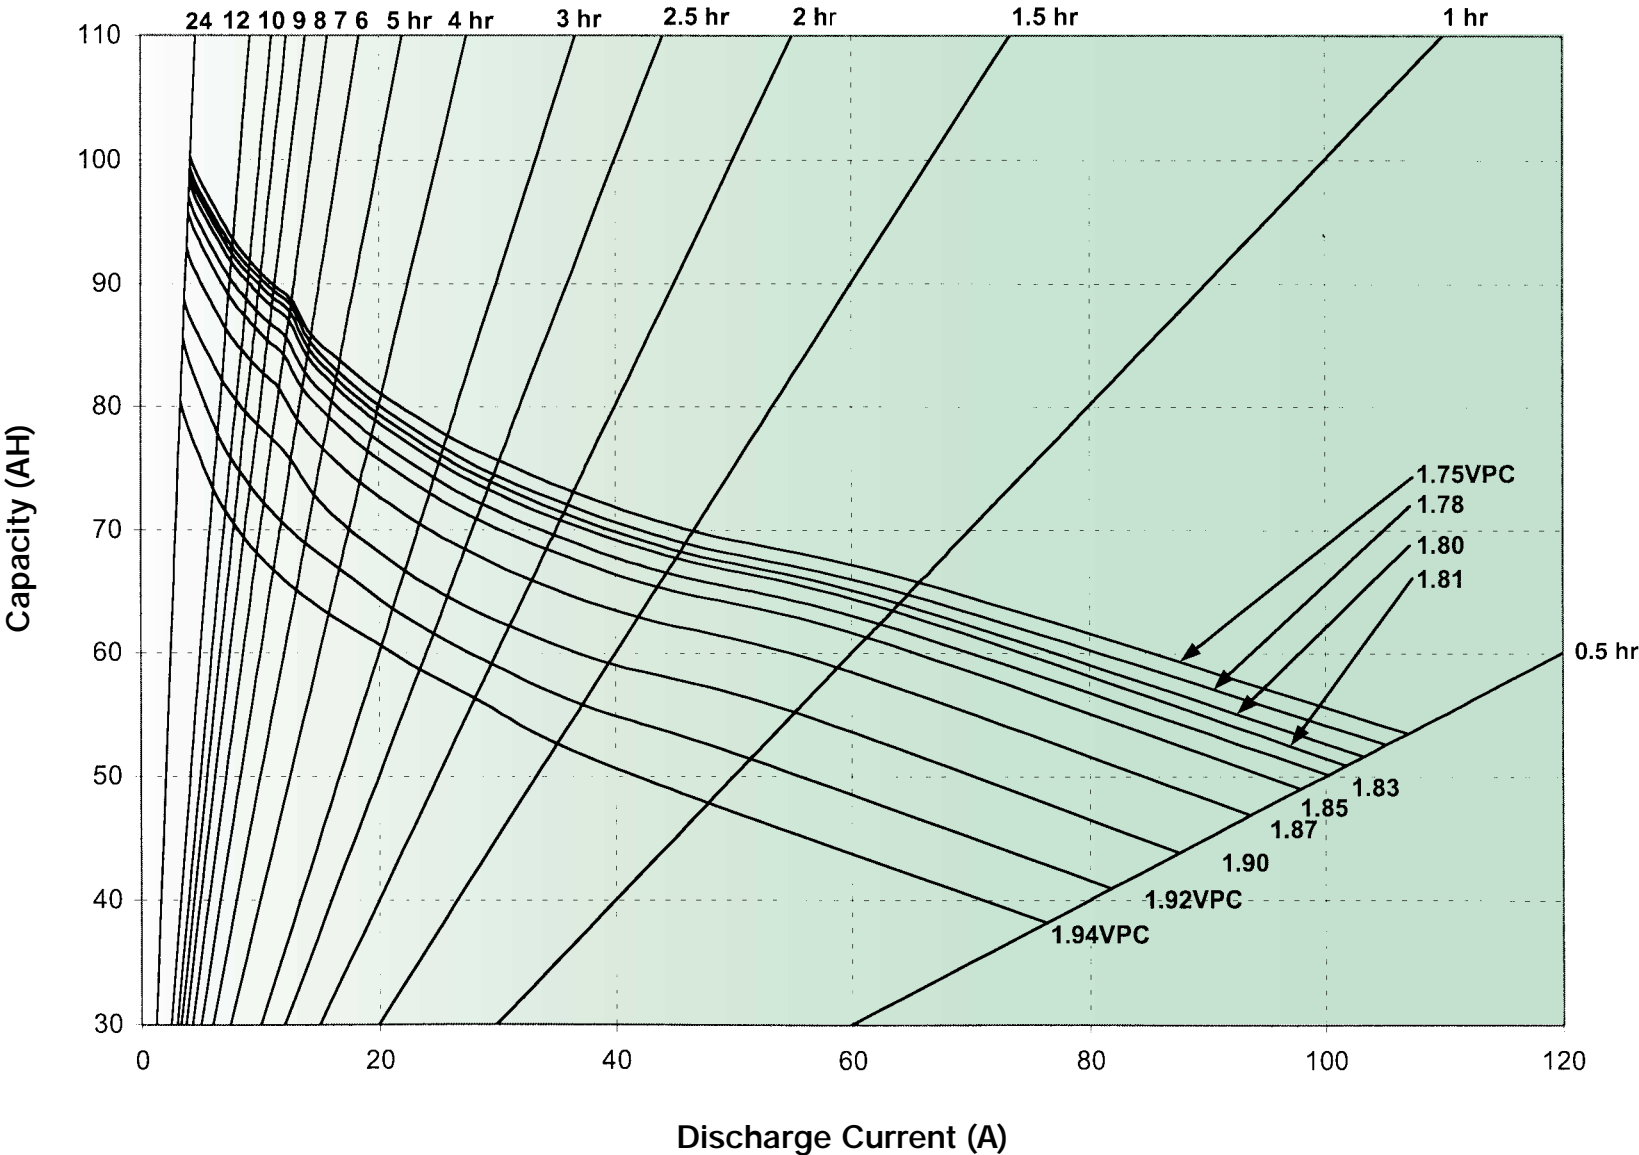


TM

M12V190(F) - Performance Curves Amperes @ 25°C (77°F)

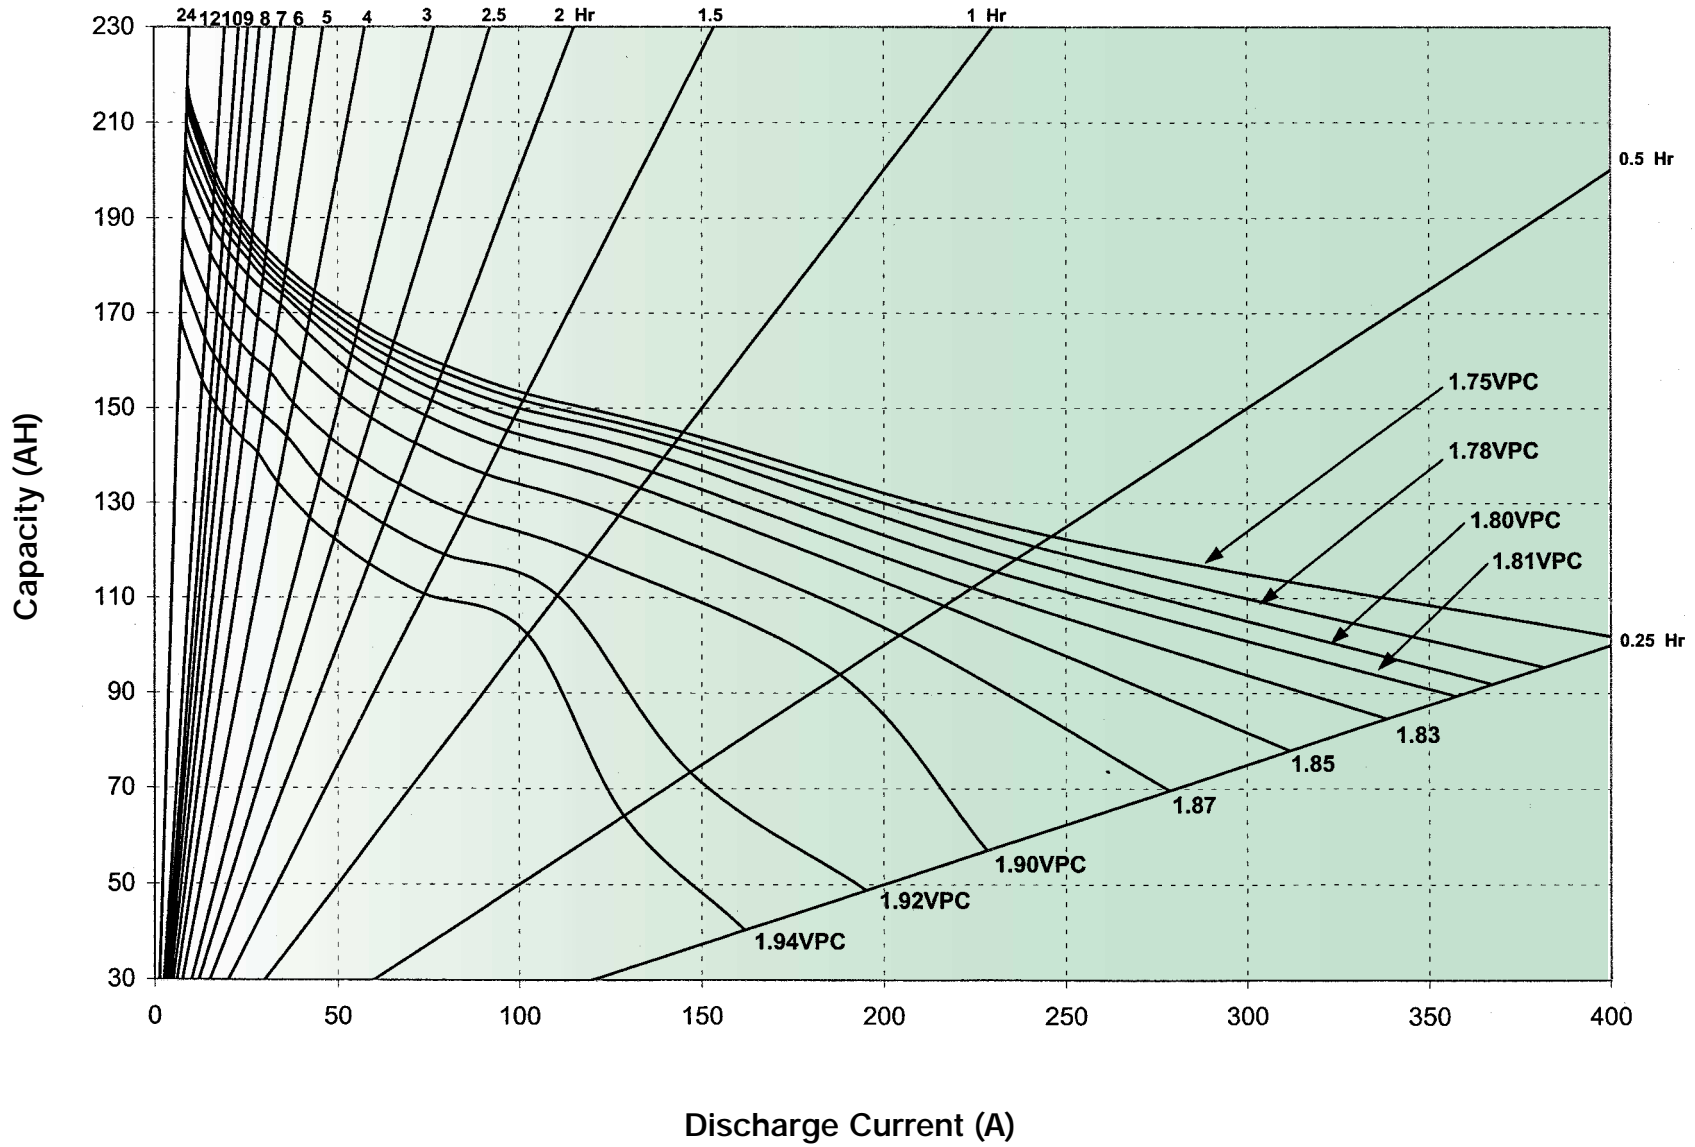

Recharge Characterization
 2.27 VPC Float @ 25°C (77°F)

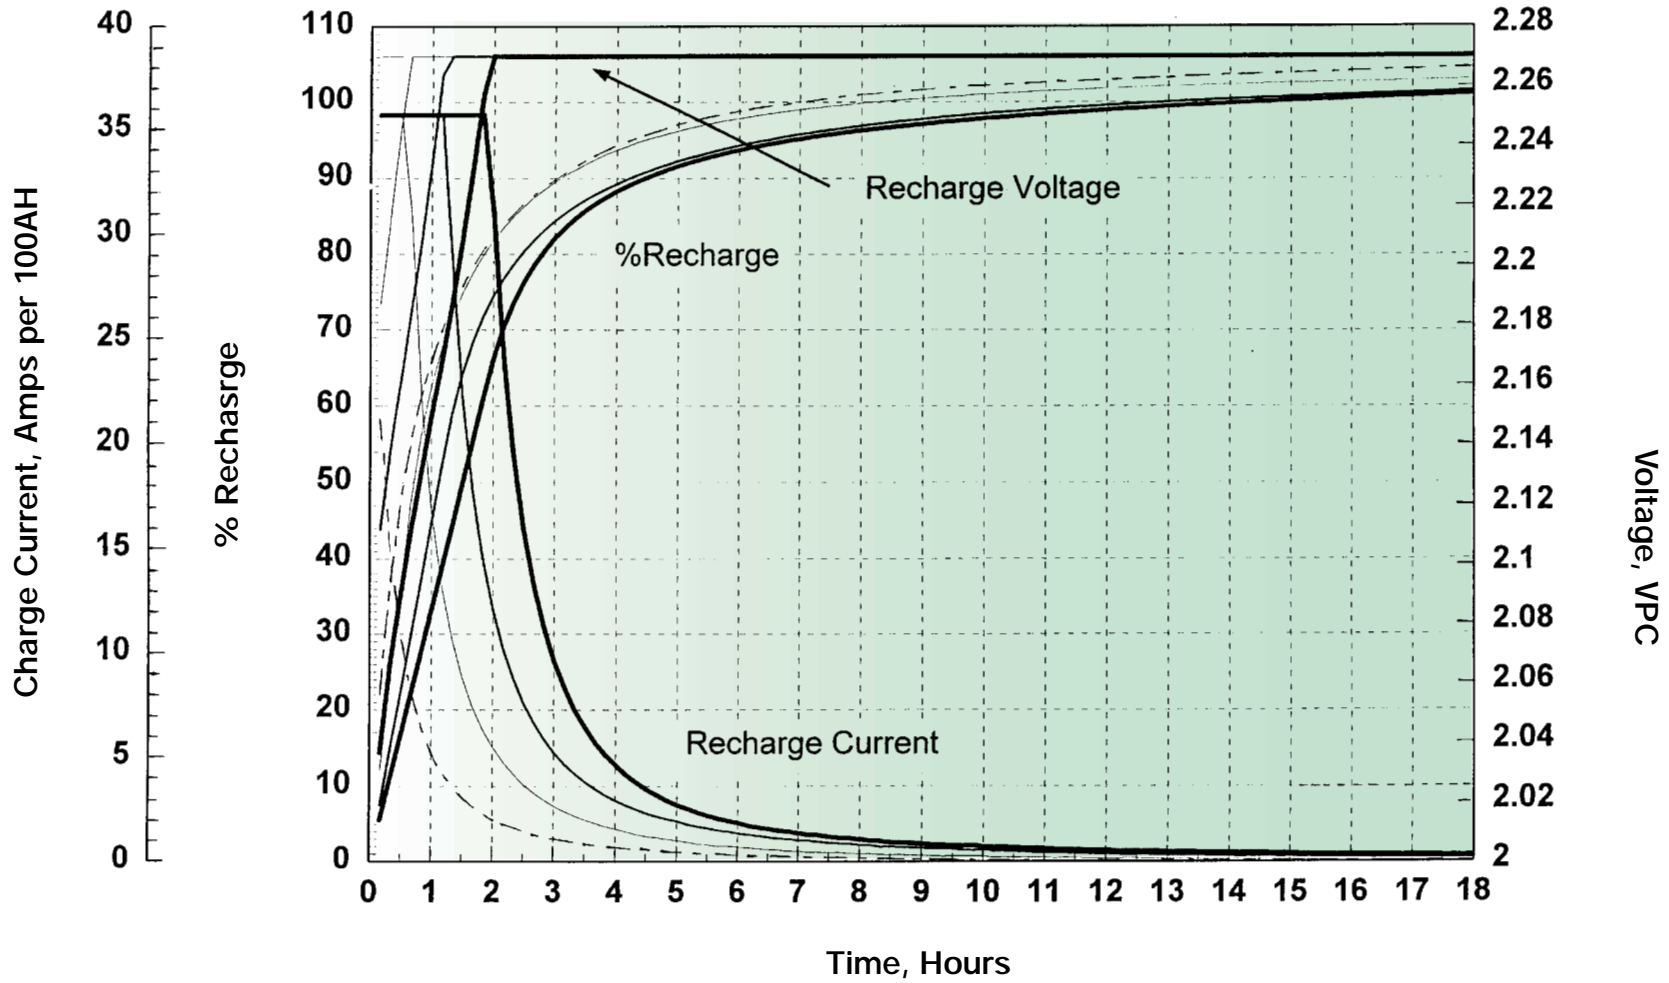

----- 20% DOD - - - - - 50% DOD - · - · - 80% DOD _____ 100% DOD

Voltage, VPC



MARATHON  **N**™

GLOBAL OPERATIONS

NORTH AMERICA

GNB Industrial Power
Lombard, Illinois U.S.A.
TEL: 1.630.629.5200
FAX: 1.630.629.2635

GNB Industrial Power
Maple, Ontario Canada
TEL: 1.905.669.9326
FAX: 1.905.669.7688

EUROPE

Exide Technologies
Büdingen, Germany
TEL: 49.6042.8170
FAX: 49.6042.81233

MIDDLE EAST/AFRICA

Exide Technologies
Abu Dhabi, U.A.E.
TEL: 971.2.226235
FAX: 971.2.227644

JAPAN

GNB Industrial Power Japan
Tokyo, Japan/Pacific Rim
TEL: 81.3.5325.6281
FAX: 81.3.5325.2063

AUSTRALIA/NEW ZEALAND

Exide Technologies
Padstow, N.S.W. Australia
TEL: 61.2.9722.5700
FAX: 61.2.9774.2966

SOUTH EAST ASIA

Exide Technologies S.E. Asia
Singapore
TEL: 65.546.2866
FAX: 65.546.2966

CHINA

Exide Technologies
Hong Kong, China
TEL: 852.3106.2668
FAX: 852.3106.0260

Exide Technologies
Beijing, China
TEL: 86.10.6510.2910
FAX: 86.10.6510.2912

LATIN AMERICA


GNB Industrial Power
Lombard, Illinois U.S.A.
TEL: 1.630.629.5200
FAX: 1.630.629.2635

INDIA

GNB Industrial Power
Bangalore, India
TEL: 91.80.550.0581
FAX: 91.80.550.0582

www.gnb.com

Industry Leader in Network Power

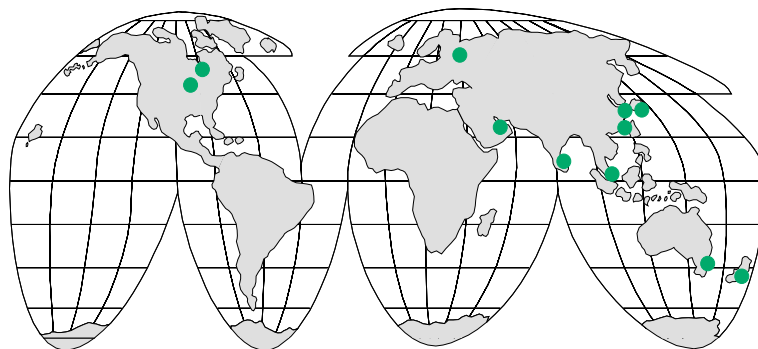

The Network Power Division of Exide Technologies is *the* global leader in stored electrical energy solutions for all major critical reserve power applications and needs. Such network power applications include communication/data networks, UPS systems for computers and control systems, and electrical power generation and distribution systems. With a strong manufacturing base in both North America and Europe and a truly global reach (operations in greater than 80 countries) in sales and service, the Network Power Division has all of the tools necessary to satisfy your power needs.

Based on over 100 years of technological innovation the Network Power Division continues to lead the industry with such recognized global brands as Absolyte, Sonnenschein, Marathon, Sprinter, and Flooded Classic. These products and brands are synonymous with quality, reliability, performance and excellence in all markets served.

In addition to being the leader in delivering premium products to the market, Exide Technologies takes pride in it's commitment to the environment. As part of a complete approach to manufacturing, distributing, and recycling lead acid batteries, the Total Battery Management program has been developed to ensure a safe and responsible life cycle for all of our products.

GNB

INDUSTRIAL POWER

A Division of **EXIDE** Technologies

